

# StrapPack®

NEW Semi-Automatic Strapping Machine



**i-10**

# i-10



## NEW Semi-Automatic Strapping Machine


■ The i-10 runs strap from 5 millimeters to 15.5 millimeters (5/8 inches) without additional parts.

■ Seal time extension (maximum one-half second) is equipped for use of heavy strap.

■ The machine is ready to operate in only 45 seconds.

■ The i-10 has hardly any moving parts, which makes it easy to maintain and keeps the operation cost low.

■ Stabilized tensioning, controlled electronically with a microprocessor, can easily be adjusted from 2 kilogram-force (4.4 pounds) to 40 kilogram-force (88 pounds) with a single dial.

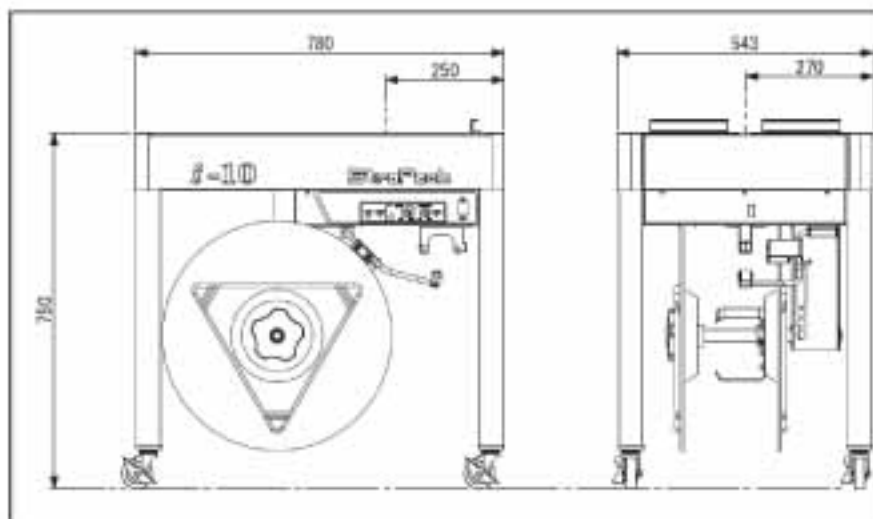

### ■ Standard Specifications

Dimension	Width	780 mm	30-3/4 in.
	Height	775 mm(with work guide)	30-1/2 in.(with work guide)
	Depth	543 mm	21-3/8 in.
	Weight	45 kg	100 lbs.
Table Height		750 mm	29-1/2 in.
Min. Package Size		W 100 X H 30 mm	W 3-7/8 X H 1-1/8 in.
Joint / Strap/ Coil		heat seal / polypropylene	heat seal / polypropylene
		ID 200 or 230 X W 200 mm	8 X 8 or 9 X 8 in.
Strap Width		5, 6, 9, 12 (15.5) mm / 0.45-0.7mm	1/4, 3/8, 1/2 (5/8) in. / 0.017-0.027 in.
Strap Tension		Max. 392 N (40 kgf)	Max. 88 lbf.
Power Supply		100-120, 200-240 V	1 Phase 50 / 60 Hz 0.25 KVA

Dimensions and specifications are subject to change without notice.

Modification rights reserved.

Pats., U.M. & design registered and/or pending.

© 2010 Strapack Corporation

### DISTRIBUTED BY:

#### STRAPACK CORPORATION

7-16-14, Genza, Chuo-ku Tokyo 104-0061, JAPAN  
Phone 81-3-6278-1805 Fax: 81-3-6278-1806  
(URL) <http://www.strapack.com> (E-mail) [info@strapack.com](mailto:info@strapack.com)

#### STRAPACK INC.

30860 San Clemente St. Hayward, CA 94544 U.S.A.  
Phone 1-510-475-6000 Fax: 1-510-475-6090

#### STRAPACK, N.V./S.A.

Lilienbaan 200, 2160 Wormmelger, BELGIUM  
Phone 32-3-355-1520 Fax: 32-3-355-1521